

CENTRALUS™ SOFTWARE

Add cloud-based control and monitoring for Pro-C™, ICC2, and ACC2 Controllers with the mobile-friendly Centralus Irrigation Management Platform.

View Centralus Software today at centralus.hunterindustries.com.

KEY BENEFITS

- Browser-based programming and communication software
- Highly secure cloud access
- Map-based navigation and status
- Instant remote control from mobile device
- Flow monitoring and reporting
- Alarm reporting and detailed irrigation history reports
- Responsive web design configures for your device, allowing the same controls from your smartphone, tablet, or desktop
- Operable in many international languages
- Wi-Fi, Ethernet, or cellular connectivity options
- Manage Solar Sync™ Sensor adjustments and delay settings for greater water savings
- Organise maintenance teams and their controllers into management groups

OPERATING SPECIFICATIONS

- Operates in most modern browsers
- Secure internet connection for web-hosted application

USER-INSTALLED OPTIONS

- ET-based Solar Sync Sensor (one per controller); **see page 156**
- Flow sensors including the Flow-Sync™ Sensor, Wireless Flow Sensor, HC Flow Meter, and other approved equals
- Connected controllers are compatible with licence-free ROAM/ROAM XL Remotes (pre-wired controller connection)

COMMUNICATION OPTIONS

- Ethernet with RJ-45 connection, low data requirements
- 2.4 GHz (only) Wi-Fi router compatible, 802.11 b/g/n
- Supported security protocols: WPA/WPA2 Personal (only), TLS
- Cellular connectivity with ICC2 and ACC2 Controllers

COMMUNICATIONS	
Model	Description
PC-WIFI	Pro-C Wi-Fi connection
WIFIKIT	ICC2 Wi-Fi connection
LANKIT	ICC2 LAN (Ethernet) connection
CELLKIT	ICC2 cellular connection (service plan required)
A2C-WIFI*	ACC2 Wi-Fi connection
A2C-LAN	ACC2 LAN (Ethernet) connection
A2C-CELL-E*	Cellular Communication Module (3G LTE) for ACC2 Controllers
A2C-LTEM	ACC2 4G Global connection (monthly service plan required)

Note


* SASO Quality Mark Certified

COMMUNICATIONS ACCESSORIES	
Model	Description
ANT-EXT-KIT	Universal Antenna Extension Kit

ACC2 COMMUNICATION MODULE INSTALLATION



A2C Communication Modules are installed behind the ACC2 Facepack

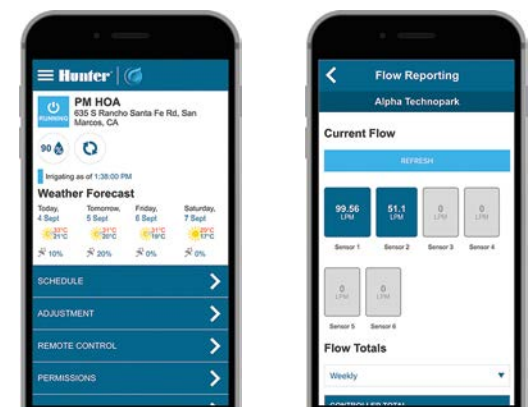

Manage and monitor controllers from anywhere



Centralus™ Software

Enable Pro-C, ICC2, and ACC2 Controllers with next-generation management technology. To learn more, visit centralus.hunterindustries.com.

Mobile-Friendly

The mobile-friendly Centralus Irrigation Management Platform provides highly secure, comprehensive cloud-based control and monitoring features. The connectivity allows you to view a controller's status, change settings, view forecasts, save water, and receive instant notification of important system alarms.

User-Friendly

The addition of internet access brings dial-based Pro-C, ICC2, and ACC2 Controllers seamlessly into the world of next-generation irrigation control. From the intuitive Centralus dashboard, it's now easier than ever to add alarm monitoring, location information, remote operation, and scheduling to Pro-C, ICC2, and ACC2 Controllers.

Easy to Upgrade

To upgrade to Centralus control, add a simple Wi-Fi, Ethernet (LAN), or cellular communication module to the controller:

- Pro-C: PC-WIFI
- ICC2: WIFIKIT, LANKIT, or CELLKIT (4G)
- ACC2: A2C-WIFI, A2C-LAN, A2C-LTEM (4G), or A2C-CELL-E (3G only)



PC-WIFI

Height: 11 cm
Width: 6 cm
Depth: 1.5 cm



WIFIKIT

Height: 10.8 cm
Width: 6.4 cm (installed)
Depth: 3.5 cm



LANKIT

Height: 10.8 cm
Width: 6.4 cm (installed)
Depth: 3.5 cm



CELLKIT

Height: 8 cm
Width: 6 cm
Depth: 4 cm



A2C-WIFI*

Height: 7.6 cm
Width: 5.7 cm
Depth: 2.5 cm



A2C-LAN

Height: 7.6 cm
Width: 5.7 cm
Depth: 2.5 cm



A2C-LTEM

Height: 7.6 cm
Width: 5.7 cm
Depth: 2.5 cm



Smart WaterMark

Recognised as a responsible water-saving tool when used with a Solar Sync Sensor