BAR SAFETY COVERS

ALBIGÈS®

☑ EASY One ☑ EASY Light
☑ EASY First Evolution
☑ EASY Top ☑ EASY Wood

User, care and maintenance manual

Please read carefully and keep for future use - 02/2022 version



Use

For the cover to keep its safety characteristics (water load-bearing capacity), it is imperative to maintain the water level at use height all year long. The water level should not drop more than 15 cm below the upper part of the coping edges. Failure to meet this condition will systematically void the guarantee.

Operating procedure


A single person can unroll the bar cover. Rolling uses the geared handle, the ROLLTROT[2®] removable motorisation (effortless) or a hand wheel for the EASY Wood.

Putting a standard type bar cover in place


- Position and fix the cover on the storage side (centred on the width).
- For lateral stairs: Install the coping edge replacement profile.
- Pull the strap to unroll the cover over the entire pool surface ①.
- Pass the tensioning straps through the pawls and start by tautening the sides (right and left) ②.
- Then tauten the central part (1, 2 or 3 pawls depending on the case) ③.
- For the EASY Wood (wooden pool) model, tauten the side bungees ⑤.
- Make sure the tautness is correct, if necessary re-tauten the sides.
- Next, depending on the case, tauten the stair flap (it is imperative to follow the order given in the installation instructions).
- Make sure all the straps are properly tautened.

Removing the bar cover

- Bring the end of the return strap outside the storage area.
- For the EASY Wood model, release the side bungees.
- Unlock the pawls and release the straps in the following order:
  - Stair pawls (see installation manual),
  - Central part pawls ③,
  - Left and right pawls ②.
- The pawls should never under any circumstances be rolled up in the cover.
- Use the geared handle, the ROLLTROT[2®] removable motorisation or the hand wheel on the EASY Wood ④ to roll the cover in to the storage area.

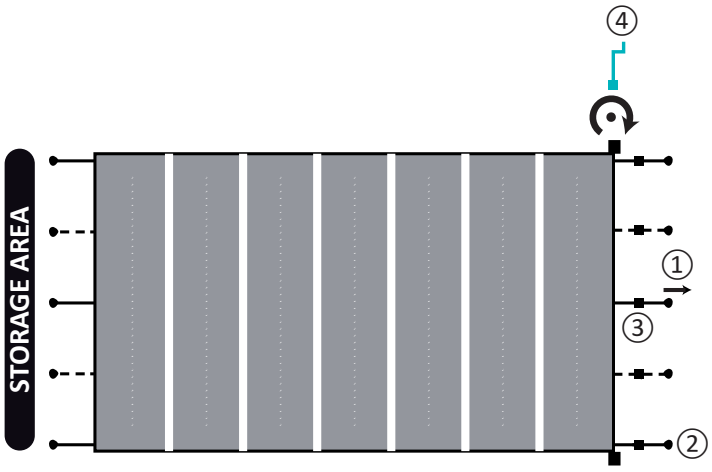

EASY One, EASY Light, EASY First Evolution, EASY Top

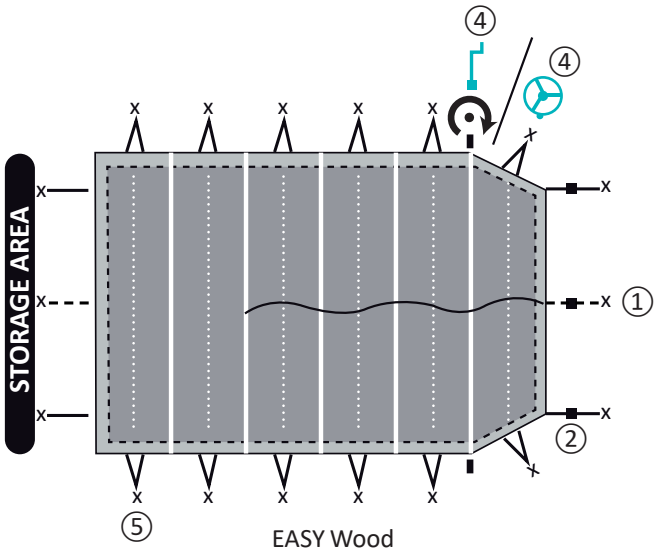

EASY Wood

Care

- Check the condition of the pads located under the tubes. If they are worn, the pads must be replaced.
- Check the condition of the abrasion strips under the cover (grey abrasion strips for the EASY TOP model and for the EASY First Evolution model grey and dark grey covers - ivory abrasion strips for the other Easy First Evolution model colours). Replace them if necessary.
- Maintenance of the bar cover is the owner's responsibility.
- Your cover should be cleaned as soon as it is liable to affect the water quality of your pool.
- Make sure the drain holes are not blocked (leaves etc.) to avoid pockets of water and twisting of the tubes (not covered by the guarantee).
- In case of snowfall **it is imperative to remove the snow from the cover.**
- In high wind, the cover must not flap or rise. If that is not the case, it is imperative to use the rise-prevention kit on the tubes.
- Never use alcohol or solvents to clean the cover, only use soapy water and a soft sponge. The use of abrasive tools and high-pressure cleaners is prohibited.
- The bar cover should not be cleaned when the cover is installed over the swimming pool.


Winterisation instructions: It is imperative to maintain the water level at use height for the cover to keep its safety characteristics (water load-bearing capacity). The water level should not drop more than 15 cm below the upper part of the coping edges.

Maintenance

- Regularly check (every 2 months) the proper tautness of the cover. Check that there is no visible distortion of the fixing system, the fixing chain or the cover.
- If a malfunction is observed preventing the pool from being closed and secured, all damaged components must be replaced as quickly as possible. Only use parts approved by the supplier / installer. Spare parts must be original and compliant with the standard's specifications.
- **Please remember that our guarantee excludes wear caused by abrasive coping, or coping that has level differences or missing grouting, and that highly curved coping edges can also cause premature wear.**

Safety Advice

General safety advice

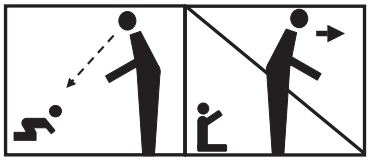

The swimming pool can constitute a grave danger for your children. Drowning happens very quickly.
Children close to a pool require constant monitoring and active supervision even if they can swim. The physical presence of a responsible adult is indispensable when the pool is open.
Learn the actions that save lives. Memorise and display the emergency service numbers near the pool.

Fire Brigade: 18 for France
Ambulance: 15 for France
Poison Centre.

Safety advice specific for covers

A child can drown in less than 3 minutes. No protection of any kind can replace the vigilance of a responsible adult, which remains the essential factor in the protection of young children. This cover is not a substitute for common sense or personal liability. **Be aware that safety is only assured with a closed, locked cover which is correctly installed in compliance with the manufacturer's instructions.** The cover must be systematically unrolled during absences, however short, from the home. The person in charge of operating the cover must make sure there is nobody and no objects in the pool and always keep the pool in full view during opening or closure operations. It is essential to fully open or close the cover, without ever leaving it in an intermediate position. Put the tools necessary for rolling up the covers out of reach of children. The roller mechanism must only be operated by a responsible adult. Climbing, walking or jumping on the safety cover is prohibited. Take all necessary measures in order to prevent access to the pool by young children when awaiting repair of the cover or when observed malfunctioning prevents closing and securing of the pool or in case of temporary unavailability of the pool equipment.

Guarantee

Type and duration of the manufacturer's guarantee:
Our products have a 3-year guarantee for normal use subject to being installed in accordance with the installation instructions for the following items: PVC fabric, aluminium profile, anchoring bushings, fixing rings and tension pawls.
For the other so-called mechanical and additional items (hand-wheel, protective runners, plugs) the guarantee is for 1 year.
The ROLLTROT$^{2®}$ removable motorisation has a 1-year guarantee subject to respecting the conditions for use, upkeep, maintenance and winterisation.
Deterioration resulting from the following weather conditions are excluded from the framework of the guarantee:
- strong winds (description of the wind by Météo-France, the French national weather service)
- heavy rain (make sure that none of the drain holes are blocked by leaves in order to avoid the formation of pockets of water)
- heavy snowfall or hail (it is imperative to remove the snow from the cover in order to avoid irreversible distortion of the tubes).

Our guarantee excludes wear due to abrasive coping edges, coping with uneven surfaces or lacking grouting.
The edges of highly rounded coping edges can also cause premature wear.
Failure to maintain the water level at use height, that is to say 15 cm from the upper part of the coping edges, voids all guarantees.
Regarding users, this guarantee does not prevent the application of the legal guarantee against hidden defects as defined by articles 1641 et seq. of the French Civil Code.
Neither does it exempt from the legal guarantee of conformity included in the French Consumer Code by order 2005136 of 17th February 2005.

French Consumer Code
Article L 211-4 -The seller is required to deliver a product which conforms to the contract and is liable for any lack of conformity which exists upon delivery. They are also liable for any lack of conformity caused by the packaging or the assembly instructions, or the installation if they installed it under contract or had it carried out under their responsibility.
Art L 211-5 - To conform to the contract, the product must:
1. Be fit for the purpose usually expected of such a product and, if applicable:
- correspond to the description given by the vendor and have the properties that were presented to the purchaser in the form of samples or models;
- have the properties a purchaser can legitimately expect considering the public declarations made by the vendor, the manufacturer or their representatives, in particular through advertising or labelling.

2. Or have the features defined by mutual agreement between the parties or be suitable for any special requirement of the buyer which was made known to the seller and which the latter agreed to.
Art L 211-12 - Action resulting from lack of conformity lapses two years after delivery of the product.

French Civil Code
Art 1641 - A seller is bound by a guarantee for hidden defects of sold goods which render it unfit for the use for which it was intended, or which so impair that use that the buyer would not have acquired it, or would only have given a lesser price for it, had they known of them.
Art 1648 - First paragraph - The action resulting from fatal flaws must be brought by the buyer within a period of two years following the discovery of the flaw.



Product: Bar cover
References: EASY One / EASY Light
EASY First Evolution
EASY Top /EASY Wood

Customer service: ALBIGÈS
150 av. des Fialets
P.A. Millau-Viaduc
12100 Millau
contact@albiges.com

AS-12-043-10B/03-2025