



STRAINERS

189 Self-cleaning strainer

Suitable for domestic water services, heating and air-conditioning plants, compressed air systems.

Supplied with an extractable straining cartridge, double pressure gauge and hose cock to dump the impurities.

SELF-CLEANING STRAINER

Filtration degree: 300µm.



SIZE	PRESSURE	CODE	PACKING
1/2" (DN 15)	16bar/232psi	1890012	1/9
3/4" (DN 20)	16bar/232psi	1890034	1/9
1" (DN 25)	16bar/232psi	1890100	1/6
1"1/4 (DN 32)	16bar/232psi	1890114	1/6
1"1/2 (DN 40)	16bar/232psi	1890112	1/5
2" (DN 50)	16bar/232psi	1890200	1/5

CERTIFICATIONS




TECHNICAL SPECIFICATIONS

Body in nickel-plated brass.

Minimum and maximum working temperatures: 0°C, 100°C in absence of steam.

Threads: ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).

OVERALL DIMENSIONS

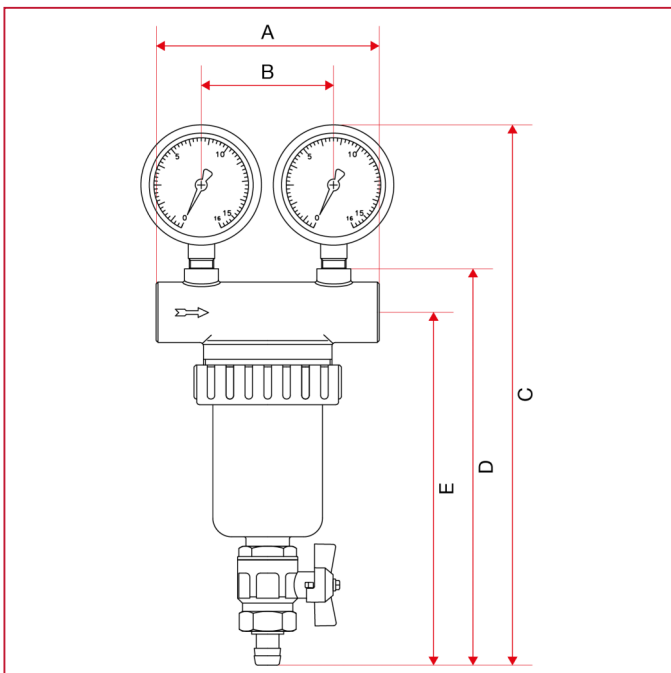



STRAINERS

	1/2"	3/4"	1"	1"1/4	1"1/2	2"
A	118	118	123	123	153	153
B	70	70	72	72	98	98
C	272	272	302	302	342	342
D	208	208	234	234	272	272
E	187	187	202	202	236	236
Kg/cm2 bar	16	16	16	16	16	16
LBS - psi	232	232	232	232	232	232



STRAINERS

LOSS DIAGRAM (With water)

