Winterisation and safety cover

SKIN Extrem

Effective opaque protection

Opaque cover

- Spring fastening
- Drainage mesh with seal
- Strap finish
- Strap reinforcements
- Abrasion resistance
- SUPERBLACK Évolution fabric
- NF P 90-308 safety cover
- Storage bag




ALBIGÈS®

MADE IN FRANCE

SKIN Extrem

Strength, resistance and longevity.

Designed and manufactured in compliance with the NF P 90-308 standard, Skin Extrem is manufactured from PVC SUPERBLACK Évolution fabric for an exceptional weight/strength factor.

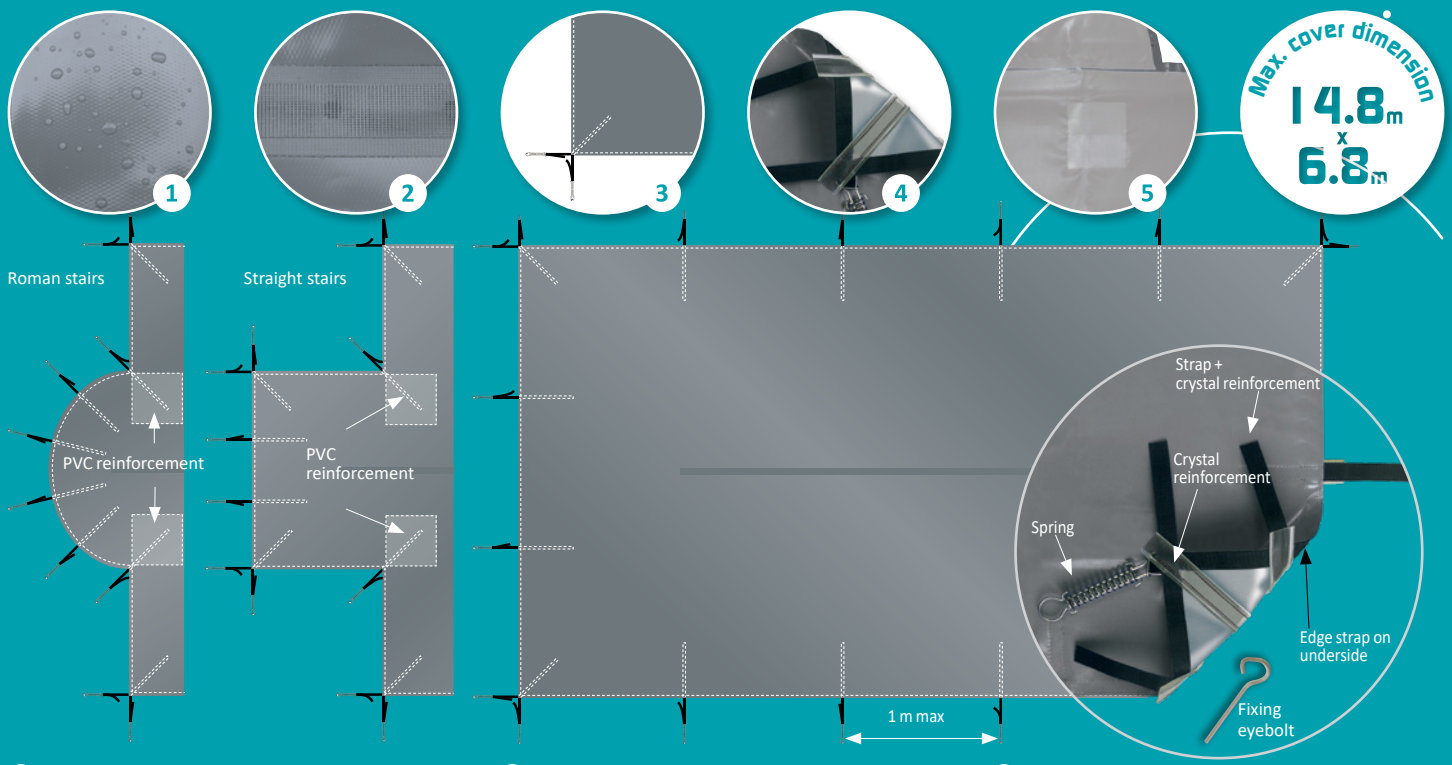

1 Opacity
Maintains water transparency. Prevents photosynthesis. Reduces the use of treatment products. Makes it easier to put your pool back into service.

2 Central drainage mesh with seal
is used to quickly drain off and filter rainwater and avoid pools of water forming, while maintaining the opacity. An effective overflow completes the system.

3 Perfect tension
its spring-fixing system gives it unbeatable tension quality.

Strength
SUPERBLACK Évolution fabric is more resistant to abrasion and tearing. Ideal for both large and small pools.

4 Abrasion protection
using the crystal strengthening placed under the straps.

5 Welded PVC corner reinforcements
welded under the cover, prevent premature wear and tear of the cover on the coping at the inside corners of stairs.

Quick and easy installation

*Production and material against any manufacturing defects within the limit of the maximum dimensions, according to our general conditions of sale.
Maximum cover dimensions:
14.8 x 6.8 m (stairs included) for compliance with the standard NF P 90-308.

GUARANTEE*
5 years

COLOURS



Blue/Grey SB - Green*/Grey SB - Amande*/Grey SB - Grey/Grey SB - Dark Grey/Grey SB

DELIVERED WITH

- PVC storage bag.
- Fixing eyebolts.
- Double-headed bungee cords.



OPTIONS

- Aluminium bushing anchor Ø 10.
- Wooden pool deck anchors with screws.



IDENTITY CARD

Fabric	Soft PVC reinforced with a polyester weft.
Weight	600 g/m².
Breaking strength	2.500 N/5 cm (warp) and 2.000 N/5 cm (weft).
Tear strength	250 N (warp and weft direction).
Treatment	UV, cryptogamic and bacterial.
Assembly	Welding.
Edge finish	Sewn strap with crystal reinforcements.
Overlap in relation to the water body	0.35 m or 0.40 m depending on the width of the coping. If it is ≥ 0.30 m, then 0.40 m overlap, if < then 0.35 m overlap.

* while stocks last

ALBIGÈS®

Recommended retailer

Nextpool GROUP

AS-02-033-12EN/09-2023 - Photos not contractually binding