

# Fittings - Barb Block

Reinforced Polypropylene




Working pressure  
Up to 14 BAR  
(200 psi) at 20 °C



Temperature  
4 °C - 90 °C  
(subject to application)

Fittings' dimensions  
↓ refer to tube ID or OD,  
↑ with respect to the  
common application.

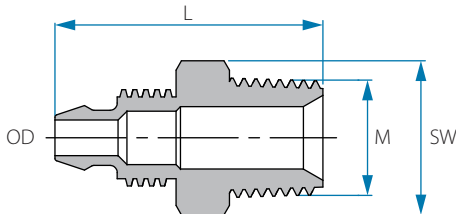

## BSPT Male Connector

| Cat. No.    | Tube OD mm | M (BSPT) | L mm | SW | Color   |
|-------------|------------|----------|------|----|---------|
| 22046846028 | 6          | 1/8"     | 27.5 | 13 | ● Blue  |
| 22046846048 | 6          | 1/4"     | 29.7 | 14 |         |
| 22046846068 | 6          | 3/8"     | 32.5 | 17 |         |
| 22046846088 | 6          | 1/2"     | 35.5 | 22 |         |
| 22046846128 | 6          | 3/4"     | 36.6 | 27 |         |
| 22046848028 | 8          | 1/8"     | 27.6 | 13 |         |
| 22046848048 | 8          | 1/4"     | 29.5 | 14 |         |
| 22046848068 | 8          | 3/8"     | 31.4 | 17 |         |
| 22046848088 | 8          | 1/2"     | 36.1 | 22 |         |
| 22046848128 | 8          | 3/4"     | 36.6 | 27 |         |
| 22046850048 | 10         | 1/4"     | 35.8 | 17 |         |
| 22046850068 | 10         | 3/8"     | 35.8 | 17 |         |
| 22046850088 | 10         | 1/2"     | 38.9 | 22 |         |
| 22046850128 | 10         | 3/4"     | 39.7 | 27 |         |
| 22046852048 | 12         | 1/4"     | 37.3 | 14 |         |
| 22046852068 | 12         | 3/8"     | 37.3 | 17 |         |
| 22046852088 | 12         | 1/2"     | 40.1 | 22 |         |
| 22046852128 | 12         | 3/4"     | 40.1 | 27 |         |
| 22046848022 | 8          | 1/8"     | 27.6 | 13 | ● Black |
| 22046852082 | 12         | 1/2"     | 40.1 | 22 |         |
| 22046846042 | 6          | 1/4"     | 29.7 | 14 |         |
| 22046848042 | 8          | 1/4"     | 29.5 | 14 |         |
| 22046848062 | 8          | 3/8"     | 31.4 | 17 |         |
| 22046852042 | 12         | 1/4"     | 37.3 | 14 |         |
| 22046852062 | 12         | 3/8"     | 37.3 | 17 |         |