

## UNI-Spray™ Series

Compact and reliable spray heads for any application

### Features

- Small exposed cover makes the unit virtually invisible for more attractive landscapes
- Constructed of durable materials including corrosion resistant stainless steel, assuring long product life even in high pressure or surge conditions
- Pressure-activated wiper seal prevents excessive flow-by and water waste and keeps debris from entering upon retraction
- Two-piece ratchet mechanism allows easy nozzle pattern alignment and provides added durability
- Three Year Trade Warranty

### Operating Range

- Spacing: 0.8 to 7.3m\*\*
- Pressure: 1.0 to 4.8 bar

### Specifications

- Flow-by: 0 at 0.75 bar or greater; 0.04 m<sup>3</sup>/h; 0.60 l/m otherwise

### Models\*


Select models shown. Review your regional price list for complete availability.

- US400: 10 cm (4") pop-up height, body only
- US410: 10 cm (4") pop-up height with VAN-10 attached
- US412: 10 cm (4") pop-up height with VAN-12 attached
- US415: 10 cm (4") pop-up height with VAN-15 attached
- US418: 10 cm (4") pop-up height with VAN-18 attached

### Models with High-Efficiency Nozzles Pre-Attached\*

- US408HE: 10 cm (4") pop-up height with HE-VAN-8 attached
- US410HE: 10 cm (4") pop-up height with HE-VAN-10 attached
- US412HE: 10 cm (4") pop-up height with HE-VAN-12 attached
- US415HE: 10 cm (4") pop-up height with HE-VAN-15 attached

\* The UNI-Spray accepts all Rain Bird nozzles

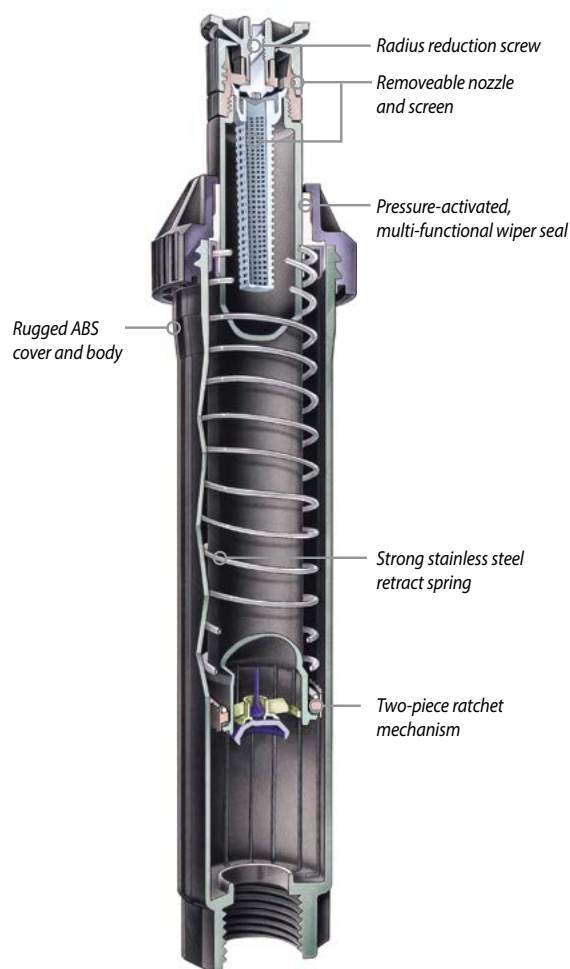

Spray Bodies



High Efficiency  
Variable Arc Nozzles  
(2.4 m, 3.0 m, 3.7 m, or 4.6 m)  
are available pre-installed



UNI-Spray™

### How to Specify

#### US - 4 - 10HE

Nozzle Series/Pattern  
HE-VAN nozzle  
R-VAN18 Nozzle

Body  
10.2cm (4")

Model  
UNI-Spray