COUVERTURES D'HIVERNAGE

ALBIGÈS

SKIN Extrem

Installation manual

Please read carefully and keep available for later use
01/2025 version

Foreword:

As a pool owner, the law requires you to secure the access to the pool of children under 5 years old.
ALBIGES will deal with your concerns thanks to its SKIN EXTREM® safety cover which is compliant with the NF P 90-308 standard.

Safety cover elements

- A cover produced in the factory to the pool shape plus the overlap.
- A bag containing as many eyebolts and springs as there are straps on the cover.
- The installation manual & User manual



ALBIGÈS

In order to comply with the NF P 90-308 standard, the cover installation must apply the following instructions

A. Checks on delivery

<u>IMPORTANT</u>, we cannot be held liable for loss or damage due to transport. Our goods are sold ex works from Albigès. They travel at the risk of the addressee (Art. 100 of the French Commercial Code), even if we advance the transport costs on your behalf.

A.1. When your order is delivered:

• Open the pack in the presence of the delivery driver and check the condition of the goods and their compliance.
• Keep the original packing

A.2. If there is damage or missing items:

• Write your reserves on the delivery document (for example: burst pack). The statement "subject to unpacking" alone is null and void.
• Send the transporter a registered letter (with acknowledgement of receipt) within three days of the delivery. This letter must accurately detail the damage found.
• Send a copy to ALBIGÈS for information.

B. Installing the cover

B.1 Installation tools

Equipment:



• 1 Wireless impact drill with a Ø 6 mm concrete drill bit
• 1 tape measure
• 1 chalk cord



• 1 cover:
- • For an 8 x 4 pool, the pack weighs 33 kg and measures 0.40 x 0.40 x 0.60(h)
- • For a 10 x 5 pool, the pack weighs 49 kg and measures 0.50 x 0.50 x 0.70(h)




Number of persons required: 2

B.2 Marking out, positioning and drilling the anchor holes for rectangular pools

<u>IMPORTANT</u>: CORRECT INSTALLATION = SAFETY
The pool must have a deck (covered or not) made of properly dosed concrete (350 kg/m3) at least 0.80 m around the pool, allowing the anchoring system to be installed (springs and anchors)

ALBIGÈS®

B.2.1 The label on the PVC packing bag indicates the exact dimensions of the cover on the pool.
B.2.2 Note down the cover dimensions and then mark them on the deck around the pool, spreading the overlaps evenly.
B.2.3 Once the cover is marked in this way, re-draw your pool shape 0.35 m bigger than the cover. This new tracing represents the anchor drill hole line.
B.2.4 Using the 6 mm drill bit, drill the deck (tilting the drill 45° outwards) in the corners of the cover (on the drilling line) starting from the storage side. For a rectangular pool, 8 drill holes are required.

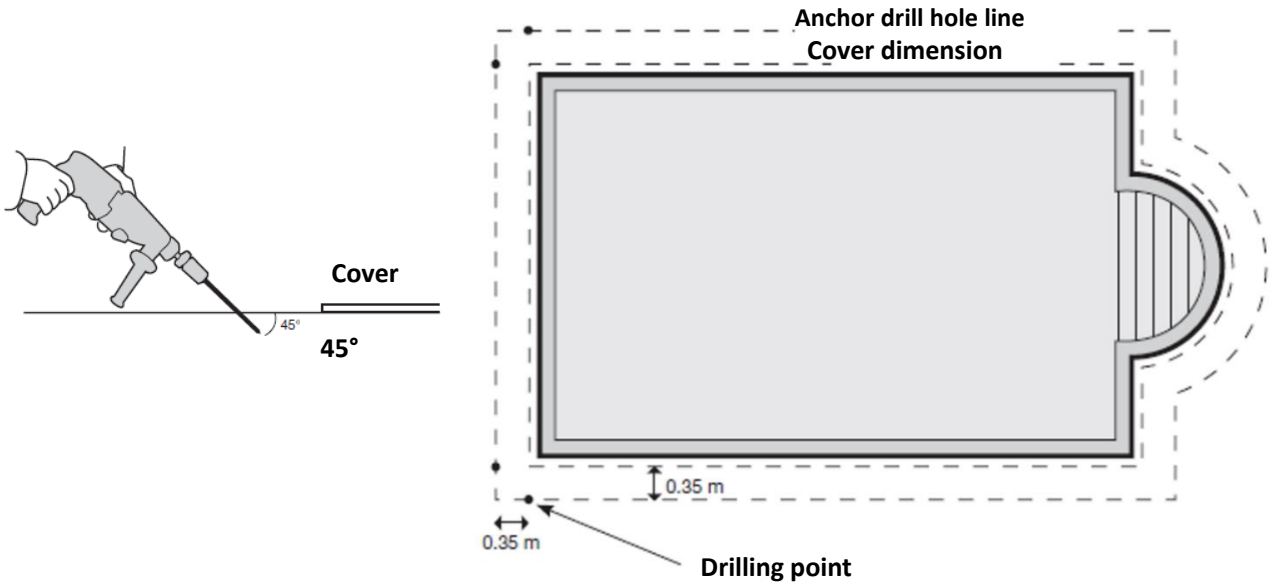

B.2.5 Install the eyebolts.


C. Installing the cover

C.1 Carry the cover next to the pool and unroll it on one width so that when unrolled, the label is on the top of the cover.




C.2 Place the springs at the end of the corner straps and anchor them to the eyebolts.



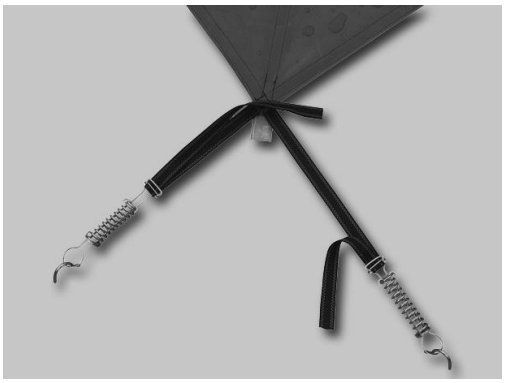

C.3 Fit the springs onto the ends of the straps on the other 2 corners, pick them up, stretch the cover over the pool.

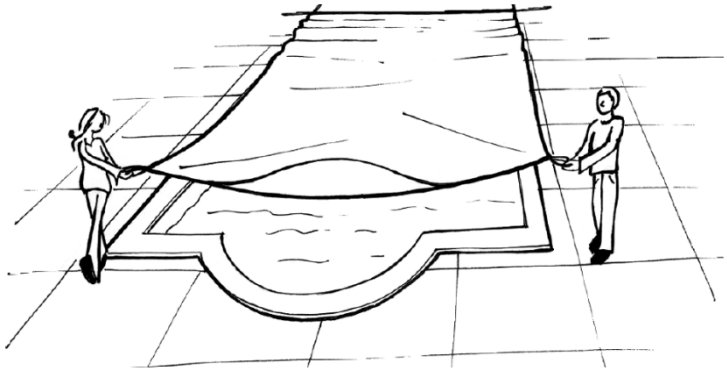

C.4 Anchor the springs around the eyebolts.

C.5 Make sure the cover is properly positioned and drill all the required holes opposite each strap (along the drilling line with the drill sloping).

C.6 Fit the springs and stretch them around the eyebolts.

Warning:
The product's compliance with the standard depends on respecting the anchoring system tension and therefore complying with the anchoring system measurements.

Product: Safety cover

References: SKIN COLD - SKIN FREEZE

Manufacturer: ALBIGÈS

Customer services:
ALBIGÈS – Service Clients
150 AV. des Fialets
PA Millau – Viaduc
12100 MILLAU
contact@albiges.com
Phone +33 (0)5 65 59 82 46

FR

Nextpool GROUP

ALBIGÈS