



→ 130 M<sup>3</sup>



# TRITON<sup>®</sup> NEO SM


The improved version of the side-mount Industry standard.



## FEATURES

- Same as Triton
- Pre-assembled ABS 6-way valve
- New dome with independent connection for manometer and air bleed
- New full plastic anti-corrosion air bleed with extra air-tube to keep shell clean
- Re-inforced inner pipes & adaptor rings
- Available with ClearPro Technology<sup>®</sup> and Provalve

Available with ClearPro Technology<sup>®</sup>




## TECHNICAL FEATURES & PRICE

Standard	Part number	ClearPro	Diameter Ø (mm)	Filter area (m <sup>2</sup> )	Flow rate (m <sup>3</sup> /h)	Max working pressure (bars)	Valve connection	Sand (kg) 0.4 - 0.8 mm	Gravel (kg) 3- 5 mm	Clearance distance (mm)	Valve	List Price (€ excl. VAT)	
												Standard	ClearPro
F-19S8-NEO	F-19S8-NEOCP		480	0.17	8.5	2.5	1.5"	50	25	825	6 way	623	791
F-24S8-NEO	F-24S8-NEOCP		610	0.29	14	2.5	1.5"	100	50	955	6 way	709	931
F-30S8-NEO	F-30S8-NEOCP		762	0.45	22	2.5	2"	200	75	1095	6 way	1005	1378
KIT-F-36S8-NEO	KIT-F-36S8-NEOCP		914	0.64	32	2.5	2"	300	100	1200	6 way	1390	1907

Valve included <sup>(1)</sup> No gravel with Clearpro technology

## DIMENSIONS

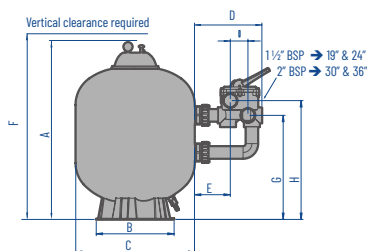

Part number	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
F-19S8-NEO	785	400	Ø 480	252	120	876	463	524	70
F-24S8-NEO	915	400	Ø 610	252	120	1006	530	592	70
F-30S8-NEO	1055	610	Ø 762	302	160	1146	590	671	70
KIT-F-36S8-NEO	1160	610	Ø 914	302	160	1251	657	738	70

## PACKAGING

Standard	Part number	ClearPro	Box				Pallet			
			Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Pce/Pallet
F-19S8-NEO	F-19S8-NEOCP		49	49	88	13.4	98	98	189	8
F-24S8-NEO	F-24S8-NEOCP		63	63	102	18.4	126	126	218	8
F-30S8-NEO	F-30S8-NEOCP		78	78	120	29.8	156	80	134	2
KIT-F-36S8-NEO	KIT-F-36S8-NEOCP		94	94	106	35.5	95	95	220	2