

## UNI-Spray™ Series

Compact and reliable spray heads for any application

### Features

- Small exposed cover makes the unit virtually invisible for more attractive landscapes
- Constructed of durable materials including corrosion resistant stainless steel, assuring long product life even in high pressure or surge conditions
- Pressure-activated wiper seal prevents excessive flow-by and water waste and keeps debris from entering upon retraction
- Two-piece ratchet mechanism allows easy nozzle pattern alignment and provides added durability
- Three Year Trade Warranty

### Operating Range (for pre-installed nozzle choices)

- Spacing:
  - 8' HE-VAN Series: 6 to 8 feet (1.8 to 2.4m)
  - 10' HE-VAN Series: 8 to 10 feet (2.4 to 3.0m)
  - 12' HE-VAN Series: 9 to 12 feet (2.7 to 3.7m)
  - 15' HE-VAN Series: 12 to 15 feet (3.7 to 4.6m)
- Pressure: 15 to 70 psi (1.0 to 4.8 bar)
- Optimum pressure: 30 psi (2.1 bar)
- Adjustable nozzle arc range: 0° - 360°

### Specifications

- Flow-by: 0 at 10 psi (0.75 bar) or greater;  
0.20 gpm (0.04 m³/h; 0.60 l/m) otherwise

### Models\*

- US400: 4" pop-up height (10.2cm)


### Models with High-Efficiency Nozzles Pre-Attached\*

- US408HE: 4" pop-up height (10.2cm) with HE-VAN-08 attached
- US410HE: 4" pop-up height (10.2cm) with HE-VAN-10 attached
- US412HE: 4" pop-up height (10.2cm) with HE-VAN-12 attached
- US415HE: 4" pop-up height (10.2cm) with HE-VAN-15 attached

\* The UNI-Spray accepts all Rain Bird nozzles



High Efficiency  
Variable Arc Nozzles  
(8, 10, 12, or 15 feet)  
are available pre-installed

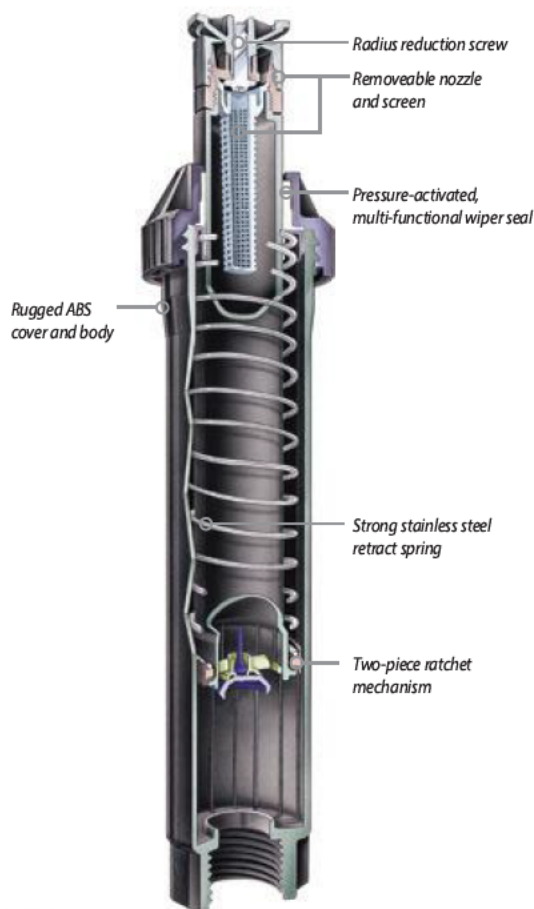

UNI-Spray™

### How to Specify

**US - 4 - 10HE**  
 Nozzle Series/Pattern  
 HE-VAN nozzle  
 Body  
 4" (10.2 cm)  
 Model  
 UNI-Spray