


Qty.	Description
1	<p data-bbox="201 383 309 405">SQE 2-70</p>  <p data-bbox="595 725 1062 748" style="text-align: center;">Note! Product picture may differ from actual product</p> <p data-bbox="201 757 464 779">Product No.: 96510152</p> <p data-bbox="201 792 1426 846">3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing.</p> <p data-bbox="201 913 1458 967">The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature.</p> <p data-bbox="201 1012 1458 1066">The motor is a single-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range.</p> <p data-bbox="201 1070 842 1093">The motor is fitted with a replaceable end cover with socket.</p> <p data-bbox="201 1137 699 1303"> Liquid: Pumped liquid: Water Liquid temperature range: 0 .. 35 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ </p> <p data-bbox="201 1348 1251 1550"> Technical: Pump speed on which pump data are based: 10700 rpm Rated flow: 2 m³/h Rated head: 71 m Approvals: CE,PCBC,RCM,EAC,CN Rohs Exempt,Morocco,UKCA,SEPRO Curve tolerance: ISO9906:2012 3B </p> <p data-bbox="201 1594 932 1908"> Materials: Pump: Stainless steel EN 1.4301 AISI 304 Impeller: Composite ZYTEL 70G30 HSLR PA6.6-GF30 Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304 </p> <p data-bbox="201 1953 655 2087"> Installation: Maximum operating pressure: 15 bar Pump outlet: RP1 1/4 Minimum borehole diameter: 76 mm </p>



Company name:

Created by:

Phone:


Date:

17/03/2026

Qty. Description


1	Electrical data:	
	Motor type:	MSE3
	Power input - P1:	1.55 kW
	Rated power - P2:	1.15 kW
	Power (P2) required by pump:	0.91 kW
	Mains frequency:	50 Hz
	Rated voltage:	1 x 200-240 V
	Rated current:	8.4 A
	Power factor:	1.00
	Rated speed:	10700 rpm
	Start. method:	direct-on-line
	Enclosure class (IEC 34-5):	IP68
	Insulation class (IEC 85):	F
	Length of cable:	1.5 m
	Motor No:	96160855
	Others:	
	Net weight:	5.02 kg
	Gross weight:	5.74 kg
	Shipping volume:	0.0094 m ³
	Danish VVS No.:	388442470
	Swedish RSK No.:	5853371
	Finnish LVI No.:	4762531
	Norwegian NRF no.:	9041352
	Country of origin:	MX
	Custom tariff no.:	84137029

96510152 SQE 2-70 50 Hz

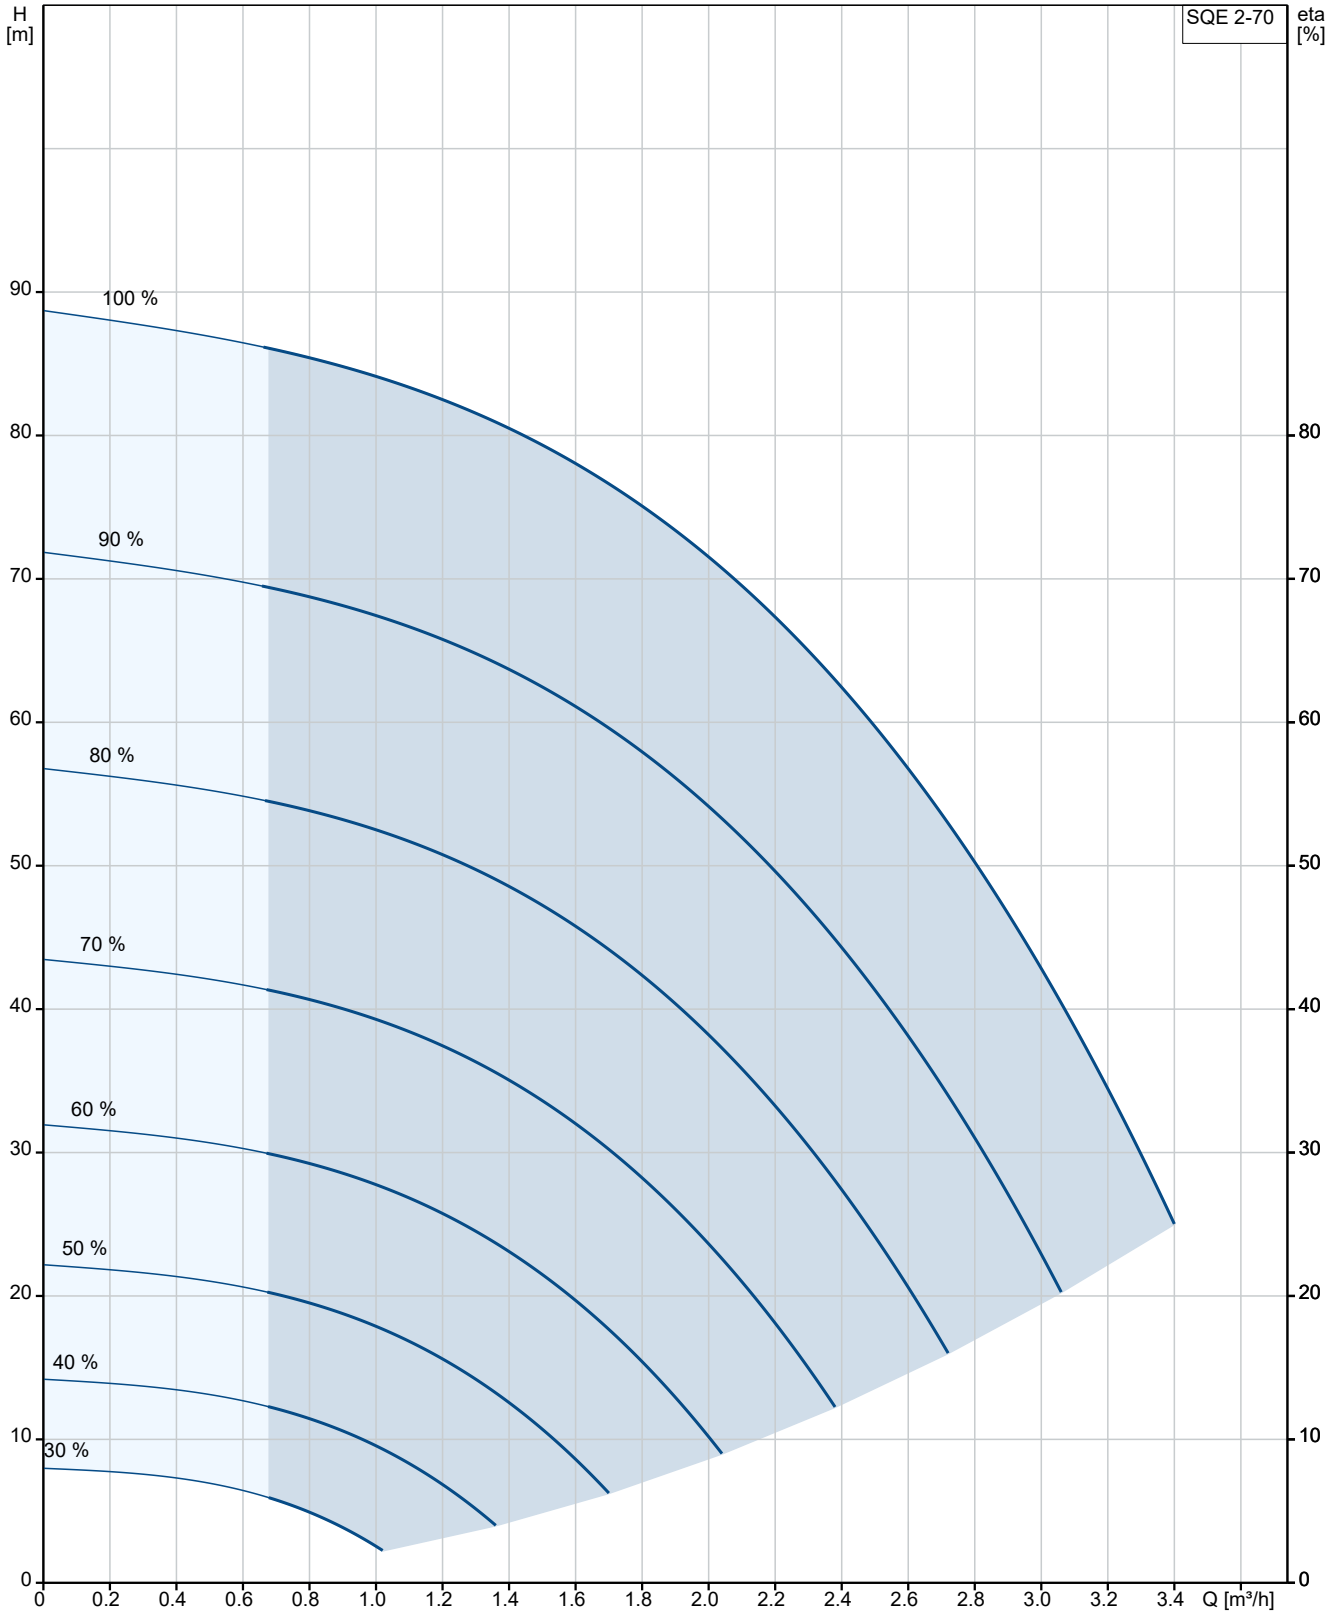


Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³

Description	Value
General information:	
Product name:	SQE 2-70
Product No:	96510152
EAN number:	5700396502502
Technical:	
Pump speed on which pump data are based:	10700 rpm
Rated flow:	2 m ³ /h
Rated head:	71 m
Stages:	4
Approvals:	CE,PCBC,RCM,EAC,CN Rohs Exempt,Morocco,UKCA,SEPRO
Curve tolerance:	ISO9906:2012 3B
Pump No:	96080394
Model:	C
Valve:	pump with built-in non-return valve
Materials:	
Pump:	Stainless steel EN 1.4301 AISI 304
Impeller:	Composite ZYTEL 70G30 HSLR PA6.6-GF30
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Installation:	
Maximum operating pressure:	15 bar
Pump outlet:	RP1 1/4
Minimum borehole diameter:	76 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 35 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor type:	MSE3
Power input - P1:	1.55 kW
Rated power - P2:	1.15 kW
Power (P2) required by pump:	0.91 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	8.4 A
Power factor:	1.00
Rated speed:	10700 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	Y
Thermal protec:	internal
Length of cable:	1.5 m
Motor No:	96160855
Controls:	
CU 300/CU 301:	communication with CU 300/CU 301 possible
Others:	
Net weight:	5.02 kg

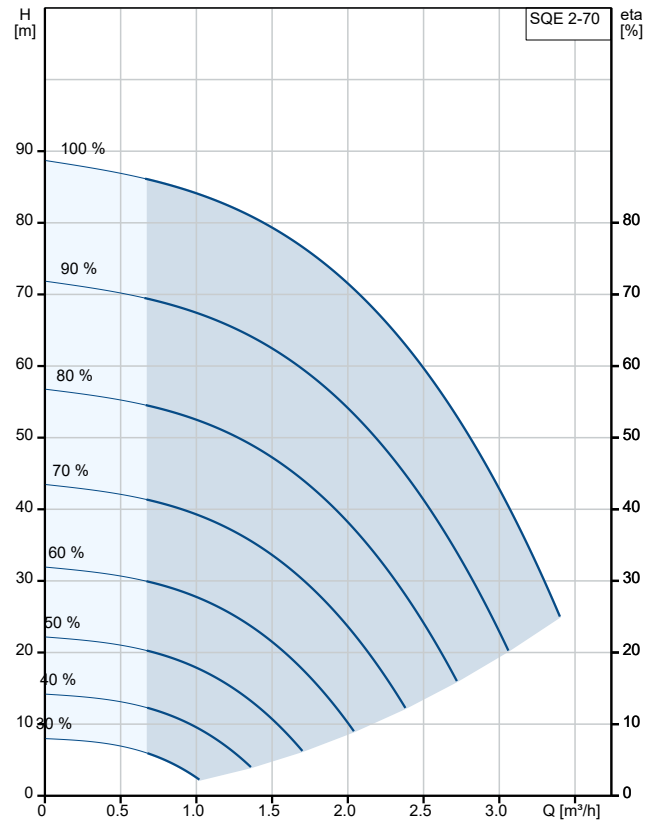

Pumped liquid = Water
 Liquid temperature during operation = 20 °C
 Density = 998.2 kg/m³





Company name:

Created by:


Phone:

Date:

17/03/2026


Description	Value
Gross weight:	5.74 kg
Shipping volume:	0.0094 m ³
Sales region:	EU/S-AMREG/APREG
Danish VVS No.:	388442470
Swedish RSK No.:	5853371
Finnish LVI No.:	4762531
Norwegian NRF no.:	9041352
Country of origin:	MX
Custom tariff no.:	84137029

96510152 SQE 2-70 50 Hz

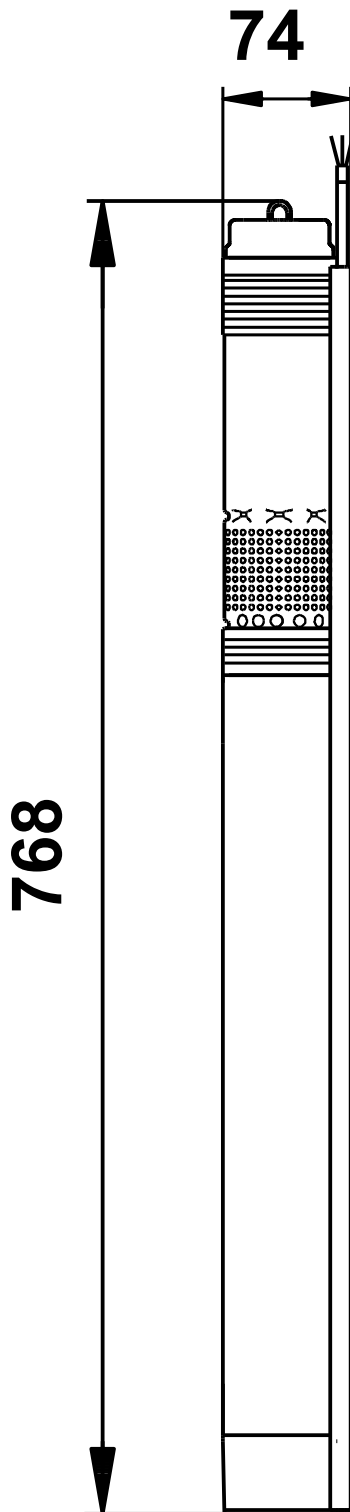

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

96510152 SQE 2-70 50 Hz

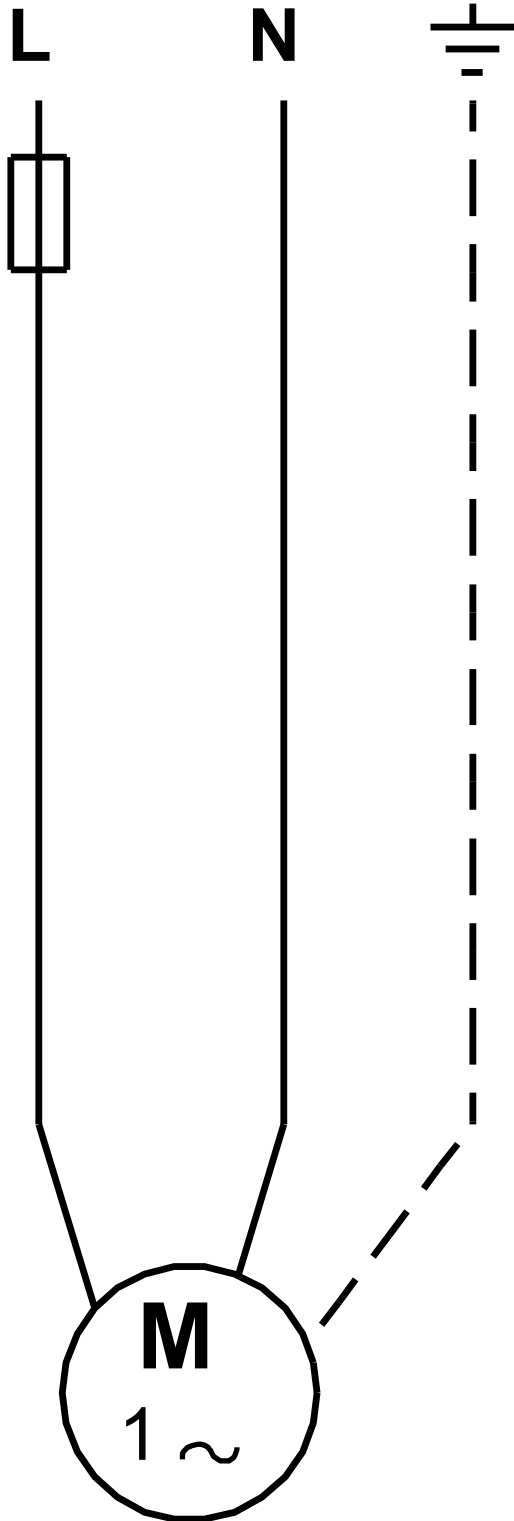

Note! All units are in [mm] unless others are stated.