


# COD. 21.21.16

## ELECTROFUSION 90° TEE

SDR 11 - PN 16

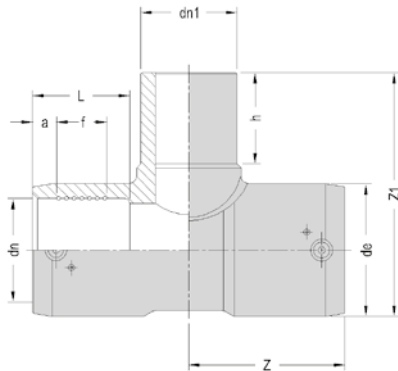

54

DIMENSIONS									WEIGHTS
dn	dn1	de	L	f	a	h	Z	Z1	
25	25	39	33	15	11	60	53	111	95
32	32	44	44	28	10	48	64	94	105
40	40	54	49	37	11	57	73	112	175
50	50	66	55	36	12	62	81	128	300
63	63	81	61	32	13	72	94	153	420
75	75	96	64	29	18	75	113	176	700
90	90	116	70	37	18	85	125	202	1170
110	110	141	76	39	20	84	141	233	1725
125	125	161	79	42	19	100	156	269	2800
140	140	174	85	38	20	121	150	308	3200
160	160	206	89	51	20	127	184	350	5570
180	180	227	105	48	23	130	188	368	5810
200	200	252	112	55	23	135	205	400	7590
225	225	276	120	45	36	143	226	442	9950
250	250	307	127	53	33	158	251	490	13460
315	315	386	145	54	48	177	295	595	24700

dn	WELDABILITY ON PIPE/FITTING PE 100	
	SDR 17	SDR 11
25		● ▲
32	● ▲	●
40	● ▲	●
50	●	●
63	●	●
75	●	●
90	●	●
110	●	●
125	●	●
140	●	●
160	●	●
180	●	●
200	●	●
225	●	●
250	●	●
315	●	●

- weldable only with monovalent welding units Serie Euro
- weldable only with universal ef units
- ▲ minimum weldable thickness 3 mm

- \_ Moulded in PE 100-RC
- \_ Absolutely compulsory the use of aligning clamp for all diameters
- \_ Absolutely compulsory the pipes/fittings scraping