

SME 1
SME 2




Operating Instruction

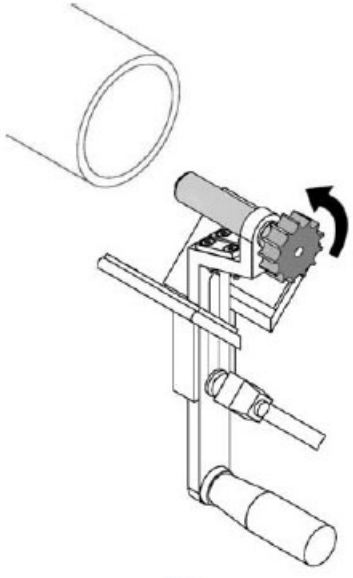

①

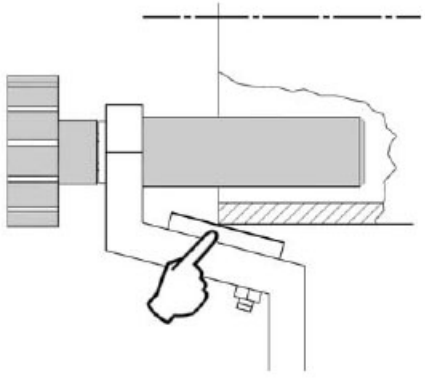


②

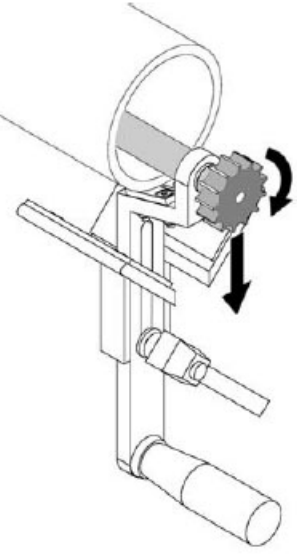


③

(1) Adjust the handle as pic.1 ans pic.2 so that the pipe orifice and the blade are in the position shown in pic.2 .
(2) As shown in pic.3, attach the alumnium bar closely to the inner wall of pipe, then rotate the handle and lock it at this position.
(3) As shown in pic.4, press the fixed alumnium plate against the outer wall of pipe, and then rotate the lock handle.
(4) As shown in pic.5, rotate the handle clockwise a few times to finish the bevelling.

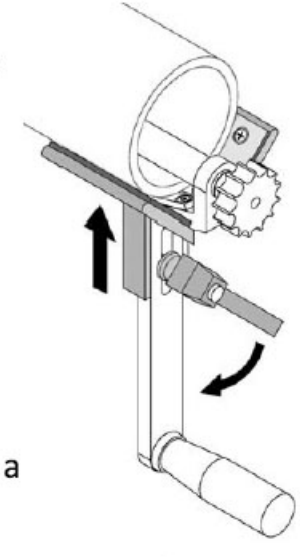

④

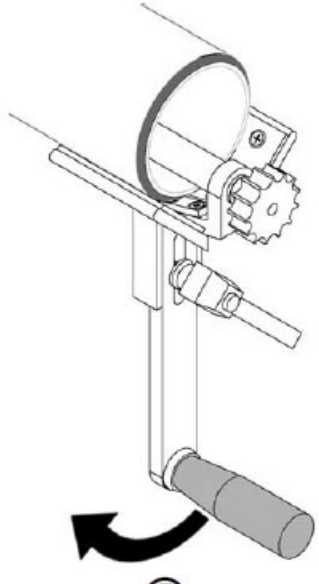

⑤

